

# INTESIS BMS Interface for MHI air conditioners

All technical support, including specifying work, compatibility issues, product quality (repair and replacement issues), product liability issues and the required after sales service (including spare parts supply) will be provided by Intesis as it is an Intesis product.

Product sales and delivery will be conducted by Intesis as well.

For details concerning such matters please directly contact Intesis.

## Integration of MHI KX in your KNX installation by Superlink

### MH-AC-KNX-48

(Max 48 indoor units / Superlink I & II)

### MH-AC-KNX-128

(Max 128 indoor units / Superlink II)




INTEGRATED GATEWAY

- Bidirectional: Supervision and Control
- Robust and reliable hardware
- Direct connection to KNX TP-1 BUS
- Independent management of communications
- Power supply: 230 VAC 50/60Hz
- Wall mounting case

Intesis software

TOUCH SCREEN

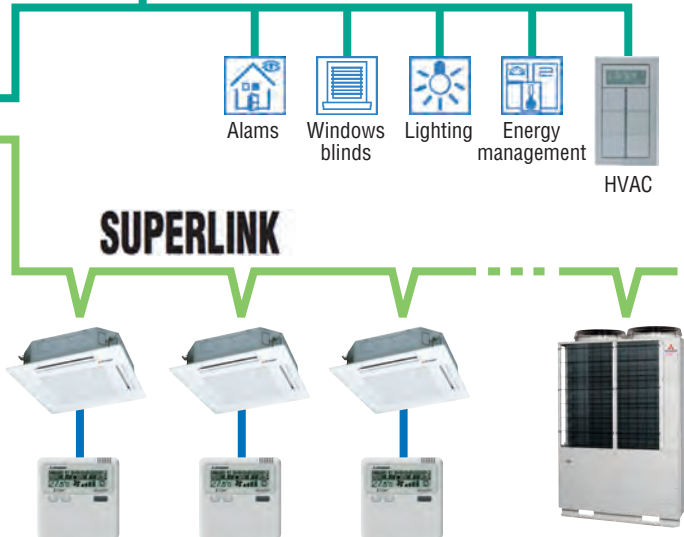

## Integration of MHI KX in your Modbus installation by Superlink

### MH-AC-MBS-48

(Max 48 indoor units / Superlink I & II)

### MH-AC-MBS-128

(Max 128 indoor units / Superlink II)



INTEGRATED GATEWAY

- Bidirectional: Supervision and Control
- Robust and reliable hardware
- Modbus TCP or Modbus RTU RS-485/RS-232
- Independent management of communications
- Power supply: 230 VAC 50/60Hz
- Wall mounting case

Intesis software

MODBUS

